


SAFETY RECOMMENDATIONS

Safety glasses and gloves should be worn during the service.
Use extreme caution when raising the vehicle on the lift.





PREPARATION

Attach to **NEW FLUID** cap / inlet tube the appropriate Wynn's Differential Fluid.
Connect battery cables to vehicle's battery.
Select appropriate adapter.



Attach the appropriate adapter to the **BLACK & RED** service hoses.
NOTE: Use larger suction wand whenever possible.

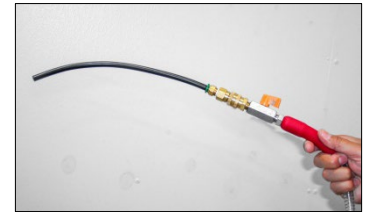



DRAIN DIFFERENTIAL

Open ball valve on **BLACK** service hose, and insert adapter into vehicle's differential fill hole.




Set the **USED FLUID** switch to the **ON** position to remove fluid from the vehicle's differential.
Set the switch **OFF** when finished.
NOTE: If vehicle has a drain plug, it can be removed to drain the system.

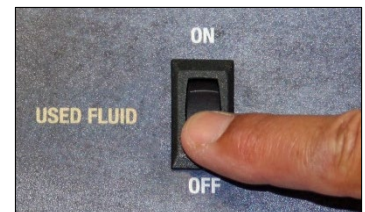

FILL DIFFERENTIAL



Open ball valve on **RED** service hose, and insert adapter into vehicle's differential fill hole.



Set the **NEW FLUID** switch to the **ON** position to add fluid to the vehicle's differential.



Set the switch **OFF** when finished.

WARNING: Failure to turn NEW FLUID switch OFF before closing ball valve will cause blown fuse and or pump damage.

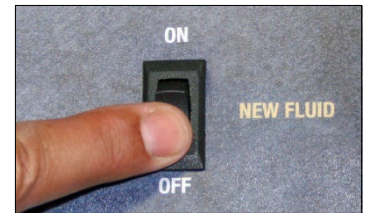

DISCONNECT

Close ball valves and remove adapters from service hoses.

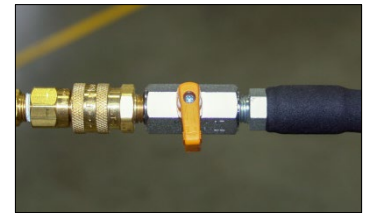

Disconnect battery cables from vehicle's battery.

